

### IMPORTANT NOTES BEFORE YOU BEGIN

#### Technical specifications

Dimensions:	Ø 67 x120 mm
Housing material:	Al-Mg-Si-1 anodized
Filter typ:	As you ordered
Connection:	Inlet G1/2 internal thread, outlet G1/2 external thread
Flow rate:	5 – 7 Liter per minute at 2 – 3 bar water pressure

#### General instructions

The delivery includes the selected filter cartridge. The cartridge is already pre-installed in the filter housing. All installation work should be carried out and checked by experts. riva is not liable for faulty installation.

**Make sure that the water in and outlet are installed correctly. The arrow on the body and cartridge indicates the direction of flow which must be observed.**

In the event of improper installation, no liability is assumed for any damage arising. Protect from frost. The filter cartridge should be changed after 6 months (DIN 1988). However, an earlier change may be necessary if the water flow is noticeably/ visibly reduced. A previously necessary change is not a defect in the cartridge used, but an indication of an increased occurrence of fine particles in the unfiltered water.

For use in conjunction with a hot water boiler or instantaneous water heater, please contact your system specialist. When installed under the sink, the filter must be professionally connected directly to the angle valve of the cold water pipe. In exceptional cases, condensation water may form in the filter housing of very cold water in the supply line for physical reasons. An installation always requires the installation of a certified check valve / inlet stop or a water stop system, e.g. Aquastop.



1

- You need a riva VARIO filter housing, a riva filter cartridge and a riva hose connection set with adapters.
- Before starting the assembly, close the water supply line at the corresponding water pipe.
- Remove the filter housing from the packaging. The filter cartridge is already inserted in the housing.
- Required tool: fork wrench 24 (fork width 24 mm) or a pipe wrench.


### Connection filter system



2

- Close the cold water connection and loosen the connection to the fitting with the Gabess spanner or the pipe wrench.
- Mount the flexible hoses from the riva hose set to the riva VARIO filter housing with the connection adapters (suitable for your system).
- Tighten all connections very tightly with the pipe wrench or the open-end wrench.

## Filter system connection

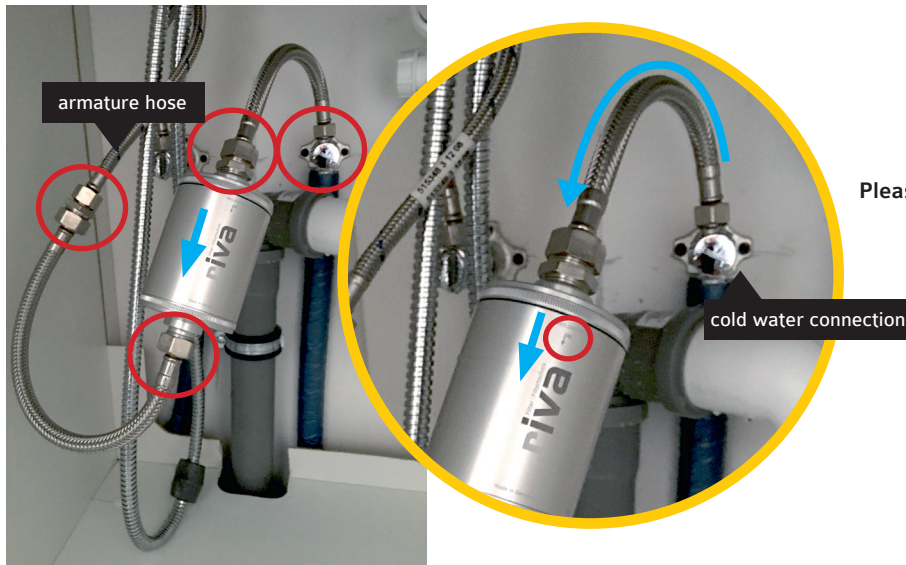

3

- Now place the riva VARIO filter system with the flexible hoses between the angle valve/cold water connection and the fitting connection.
- Tighten all connections!

Please note!

- The housing must be connected in such a way that the (cold) water input into the filter housing is always in the direction of the arrow. (arrow on VARIO housing)
- If the assembly is completed and the housing with the hoses between the cold water connection and the armature hose is tightened, the VARIO housing can be placed freely depending on the available space. Now the direction of the arrow no longer plays a role as it is already connected in the correct water flow/input direction.

## Commissioning



4

- Finally, run cold water through the kitchen faucet and check that the tightness of all connections.
- If you have any further questions or need support, please contact our service under the following telephone number:

Tel. ++49 7424 90140-18



### Maintenance

The filter system is basically low-maintenance. However, the maximum service life of the filter cartridges must be observed. Clean and lime-free fittings are the prerequisite for hygienically perfect drinking water. We recommend a cartridge change after 6 months (DIN 1988) as well as an expert leak test of the housing after a change has been carried out.

### Guarantee

The housing is covered by a 24-month warranty. Wear parts such as seals and filter cartridges as well as damage due to improper use are excluded.

**Do not forget to change the cartridge - please use the sticker!**

Use our removable riva sticker to make the next cartridge change unforgettable!

Simply turn the month for replacement upwards and apply the sticker on a smooth surface (inside of the cabinet, shelf, tile).

Example:  
3 on top = next change  
in March  
(3rd month of the year)

